


NOTES:

1. INTERPRET CALLOUTS/SYMBOLS PER ASME Y14.5M-1994
2. RECOMMENDED MATING CONNECTOR TORQUE IS 8 lb-in (90 N-cm)  
DO NOT EXCEED 12 lb-in (136 N-cm) AS DAMAGE TO CONNECTOR MAY RESULT.
3. VERIFICATION OF CHARACTERISTICS ARE IN REFERENCE WITH MIL-DTL-3928.

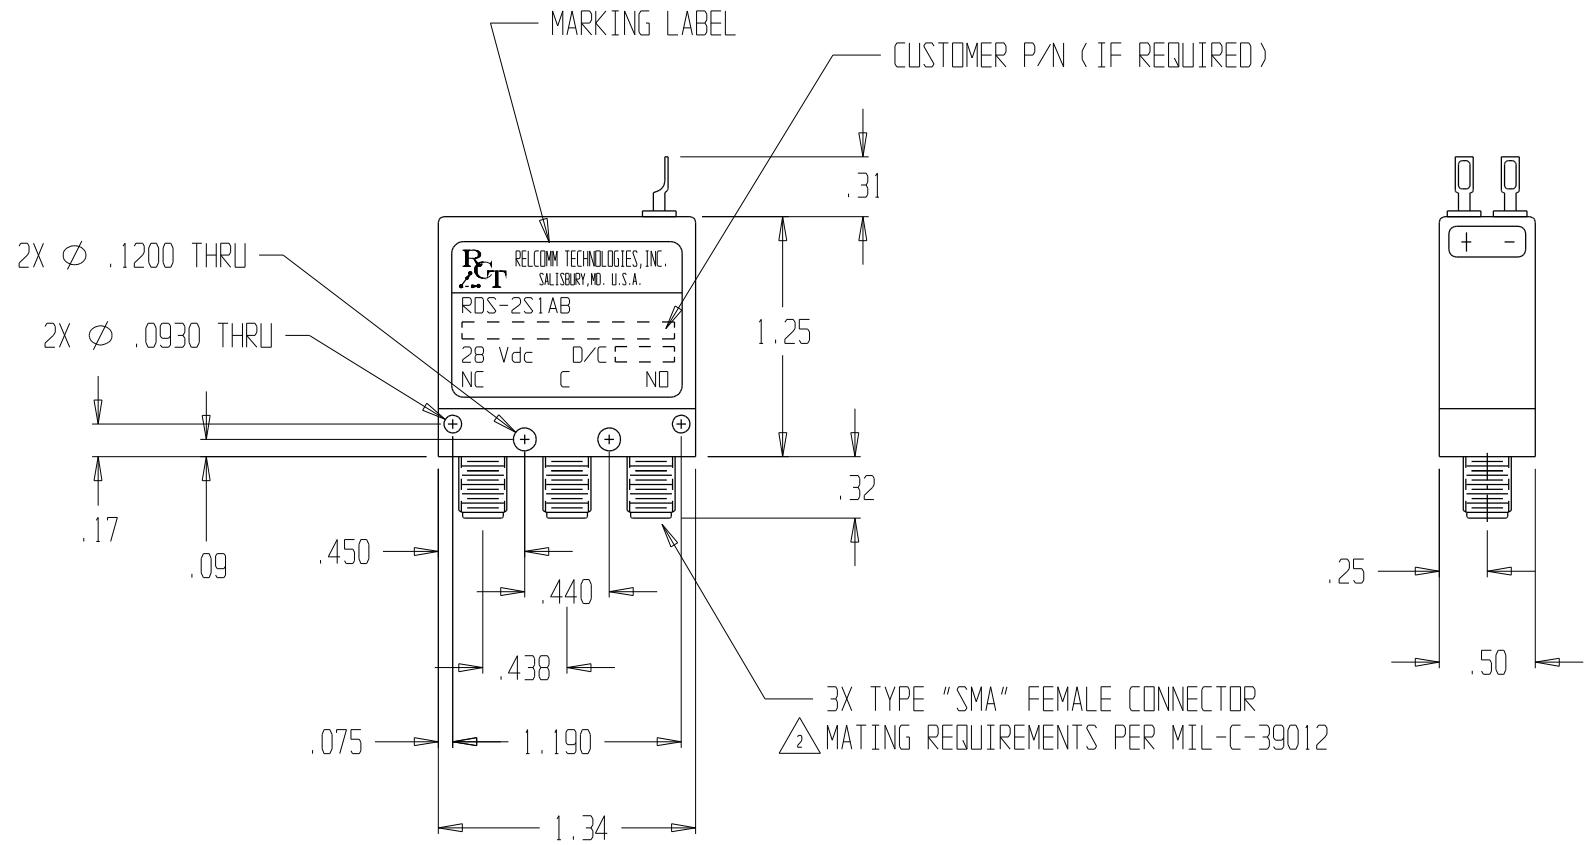


CHARACTERISTICS:

NOMINAL IMPEDANCE (OHM) -----	50			
FREQUENCY RANGE (GHz) -----	DC-4	4-8	8-12.4	12.4-18
V.S.W.R. (MAX) -----	1.2:1	1.3:1	1.4:1	1.5:1
INSERTION LOSS (dB MAX) -----	0.2	0.3	0.4	0.5
ISOLATION (dB MIN) -----	80	70	60	60
AVERAGE POWER (WATTS TYP) -----	85	55	45	35

TEMPERATURE RANGE (OPERATING) --	-40°C - +85°C
TEMPERATURE RANGE (STORAGE) ----	-55°C - +100°C
SWITCHING ACTION -----	BREAK BEFORE MAKE
OPERATING VOLTAGE (OVER TEMP) --	24 - 32 Vdc
PICKUP VOLTAGE (MAX @ 25°C) ----	20 Vdc
DROPOUT VOLTAGE -----	> 2 Vdc
ACTUATING CURRENT (mA MAX) ----	114 @ 28 Vdc & 25°C
SWITCHING TIME (MAX) -----	15 mSEC
LIFE (MIN PER POSITION)-----	1 * 10^6 CYCLES
WEIGHT (OZ) -----	1.0 NOM

MATERIALS/FINISH:

HOUSING -----	ALUMINUM/NICKEL
COVER -----	ALUMINUM/BLACK ANODIZED
CONNECTORS ---	STAINLESS STEEL/PASSIVATE
INSULATION ---	TEFLON
CONTACTS -----	BERYLLIUM COPPER/GOLD
TERMINALS -----	Ni-Fe/Sn-70 SOLDER

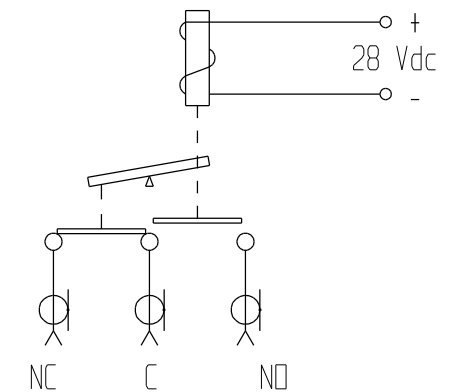

SCHEMATIC SHOWN IN DE-ENERGIZED POSITION

				UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND INCLUDE PLATING. TOLERANCES .XX ± .02 FRACTIONS ± .XXX ± .010 SURFACE QUALITY .XXXX ± .0050 63/ MAX	DR M. MAGDA 8/25/94 CK J. LAPKE 9/17/96 ENG M. MAGDA 9/17/96 MFG QA	<p>RELCOMM TECHNOLOGIES, INC. 610 BEAM STREET SALISBURY, MARYLAND 21801</p>	
4	ECN 1693	9/30/09	A. MAGDA	THIRD ANGLE PROJECTION	THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF RELCOMM TECHNOLOGIES AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEM(S) WITHOUT WRITTEN PERMISSION.		TITLE COAXIAL 1P2T RELAY "FAILSAFE"
3	1083	7/30/03	M. MAGDA			SIZE B	
2	987	8/5/02	M. MAGDA MM			DWG NO. RDS-2S1AB	REV 4
1	136	9/11/96	M. MAGDA MM	SCALE 1 : 1	DO NOT SCALE DWG	SHEET 1 OF 1	
REV	ECN NO.	DATE	APPROVAL				